

Pressure roll

Divide your pressure



VSS Agro Pressure roll

The VSS AGRO pressure roll is designed to evenly divide weight in-between the wheels of tractors. The VSS AGRO pressure roll fits between every machine and tractor, which is the main difference between the VSS AGRO Pressure roll and other systems. Because the VSS AGRO Pressure roll is assembled partially under the lower linkage of the tractor, it has a very limited build-in length. The VSS AGRO Pressure roll is equipped with Cat.2 lower link hooks to connect the machine. As an option, extended versions or heavy duty Cat. 3 lower link hooks can be provided. The standard version of the VSS Agro Pressure roll has a working width of 1,25 m, optionally it can be provided in a broad version of 1,5 m.



DR-STR



DR-LBW



DR-FFR

VSS AGRO Pressure roll type DR-STR

- Carried out with steel rings
- Optionally equipped with large rings

VSS AGRO Pressure roll type DR-LBW

- Carried out with 4 pneumatic tires
- Optionally equipped with a scraper

VSS AGRO Pressure roll type DR-FFR


- Carried out with a FarmFlex roll
- Optionally equipped with a smaller roll

DETAILS

- 1 Scraper
- 2 Linkage at all machines



1

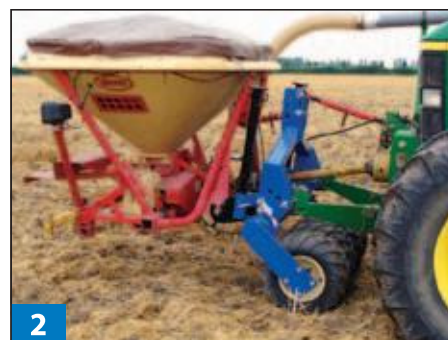

2

Type	DR-STR		DR-LBW		DR-FFR	
Type	Standard	Width	Standard	Width	Standard	Width
Mass	310 kg	330 kg	225 kg	280 kg	225 kg	280 kg
3 point linkage tractor	Cat. 2					
3 point linkage machine	Cat. 2, option lower link hook Cat. 3					
Working width	1,25 m	1,5 m	1,25 m	1,5 m	1,25 m	1,5 m
Total width	1,27 m	1,52 m	1,27 m	1,52 m	1,27 m	1,52 m
Type pressure system	Rings		Tires		FarmFlex roll	
Quantity	9	11	4	5	1	1
Type / dimension	Ø450 mm		Ø520 x 265 mm		Ø520 mm	
Option	Rings Ø500 mm		Scraper		Roll Ø390 mm	

VSS Agro

Noordland 23
4451 RP Heinkenszand
The Netherlands

T +31 113 567050
F +31 113 563939
E info@vssconstruct.com
I www.vssconstruct.com